

## Snorkel S4732E

### ELECTRIC SLAB SCISSOR LIFTS



## S4732E



DIMENSIONS	S4732E
Max. working height	11.8m
Max. platform height (A)	9.8m
Platform size (stowed)	1.09m x 2.14m
Platform size (extended)	1.09m x 3.36m
Extension deck length (B)	1.21m
Overall length (with step) (D)	2.3m
Overall length (without step)	2.26m
Overall width (C)	1.19m
Stowed height (E)	2.39m
Min. height (guardrails folded)	1.94m
Ground clearance (stowed)	66mm
Ground clearance (elevated)	19mm

PERFORMANCE	
Platform capacity	350kg
Max. drive height	9.8m
Max. wind speed	12.5m/s
Max. drive speed (stowed)	3.2km/h
Max. drive speed (elevated)	0.6km/h
Raise/lower time	50/58 sec
Gradeability	25%
Inside turning radius	0.25m
Outside turning radius	2.41m
Tyres	15 x 5 non-marking rubber
Controls	proportional
Drive system	2-wheel drive

POWER	
Power source	24V DC battery electric
Charger	90-240V, 25amp

WEIGHT	
Weight	2,693kg

#### TURNING RADIUS

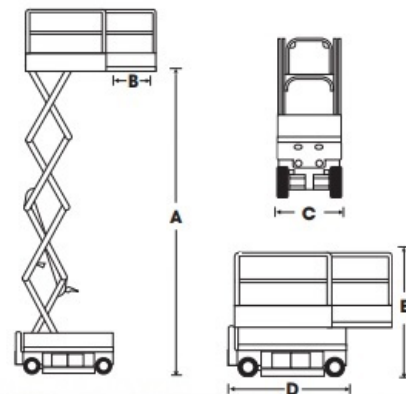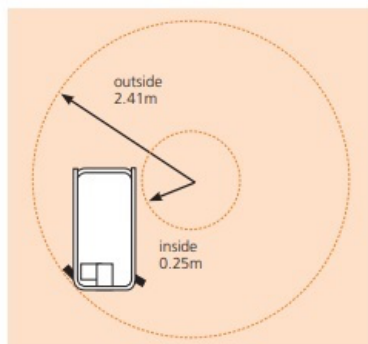

## **Hire Machine or Arrange Service Job**

**By Visiting**

[www.hoistline.com](http://www.hoistline.com)

**By Emailing**

[bookahoist@gmail.com](mailto:bookahoist@gmail.com)

**By Phoning**

01624-618-999

### **Quote**

Snorkel  
S4732E